


**HELI**

Reliable special designed instrument

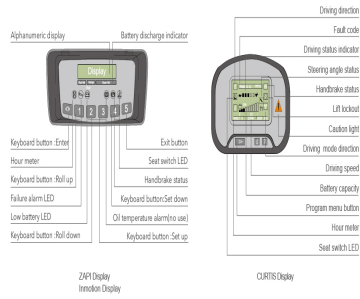

Standard configuration	Optional	Attachments
Wide view standard mat	3 edge lift free mat	Side mirror
Class III standard carriage	2 edge lift free mat	Side lifting belt positioner
Load backrest	Wide carriage	Cargo boom
Control valve	Long fork	Lifting hook
Battery	Fork extension device	Peep of clamp
Standard seat	Sideline	Side clamp
Overhead guard	Wide tire	Multifunction clamp
Overhead guard extension	Warning light	Load stabilizer
Pneumatic tires	Rear working light	Push pulley
Traction pin	Tilt warning cylinder boot	Drum clamp
Driver's tool	Cab	Hooser
LED combination instrument	Suspension seat	Carbon clamp
Head light	Customer color	Battery lifting sling
LED signal light	Coloring tires (halogen)	
Rear handle with horn	Automatic steering slow down device	

\* Details of specifications and equipment are based on information available at time of printing and may change without notice.



**ANHUI HELI CO., LTD.**  
 Add: No.188, Tangqing Road, Hefei, China  
 Fax: +86-551-6383966

Tel: +86-551-6383968(America); 6363226(Exempt);  
 6283925(India); 6362350(China Made Sales);  
 6383926(Any Accounts Inquire); 6362225(Wheel loader)

\* For products are subject to improvements and change without notice.

Copyright © 2017 Heli. All rights reserved.

**HELI**

**1-2.5t**

**G series  
AC Electric Forklift Truck**



[www.heliforklift.net](http://www.heliforklift.net)

**G SERIES 1-2.5t**



**Excellent Visibility**

- > Compact structure of mast and driver's view 9% improved.
- > Steering handle with 300mm diameter and right installation of meter effectively increase the front view.
- > Large air-chage of the overhead guard and grill tray with proper angle increase operator's speed view.

**Better Stability & More Safety**

- > New type drive axle and small foot overhang design. Longitudinal Stability of the forklift increases by 4.9%.
- > High installation of the axle increasing the overall stability 2.1%.
- > The space above driver's head is 50mm increased through increasing overhead guard's height and decreasing the seat's height.
- > The space around the driver's foot and operating safety are increased through improving the lifting cylinder to under the floor board.
- > Multi speed selection function satisfies different working conditions and environment.
- > Standard configuration of warning light and brake automatic warning function improve vehicle's safety.
- > Battery side-extraction function satisfies different customers' needs (optional).
- > Automatic decelerating while steering improve safety (optional).
- > Special side plate and top cover structure is easy for assembly and disassembly.



**High Performance & Energy Saving**

- > Lifting performance increases by 21%.
- > Charging and driving performance increases by 20% and 7%.
- > The maximum turning radius is 2020mm, good performance of driving.
- > The maximum turning radius is 1800mm (1.1R), 2000mm (2 wheel 2000mm/2.5), good performance of driving.
- > Traveling saves more than 15% energy.
- > LED signal light saves more than 85% energy.
- > Battery crusing ability prolongs about 30 minutes.

**Comfortable Operating & Lower Noise**

- > Comfortable operating is achieved through moving the steering unit up and 100mm increased operating space around driver's foot.
- > Rear handle with horn function contributes to stable sitting pose when travelling backwards and driving comfort and safety.
- > Mast buffer, rear axle buffer and four extension type valve operation knob increase operating comfort effectively.
- > Ratchet type hand brake facilitates comfort driving.
- > Six jacking on board of handle fits different types size.
- > Car noise reduces 1 dB.



Option battery side pulling

Option battery side loading

